

# > DIŐTAN BASINÇLI METAL KOMPANSATÖR METAL EXPANSION JOINT

## UEJ-0907




### CERTIFICATIONS



Basınç Sınıfı : PN16 / PN25  
Körük : Paslanmaz çelik  
İç / Dış Boru : Karbon çelik  
Flanş : Karbon çelik  
Genleşme : 30 mm / 60 mm  
Flanşlı

Pressure Rating : PN16 / PN25  
Bellow : Stainless steel  
Pipes : Carbon steel  
Flange : Carbon steel  
Expansion : 30 mm / 60 mm  
Flanged

PRODUCT	SIZE
UEJ-0907X025	DN 25
UEJ-0907X032	DN 32
UEJ-0907X040	DN 40
UEJ-0907X050	DN 50
UEJ-0907X065	DN 65
UEJ-0907X080	DN 80
UEJ-0907X100	DN 100
UEJ-0907X125	DN 125
UEJ-0907X150	DN 150
UEJ-0907X200	DN 200
UEJ-0907X250	DN 250
UEJ-0907X300	DN 300
UEJ-0907X350	DN 350
UEJ-0907X400	DN 400

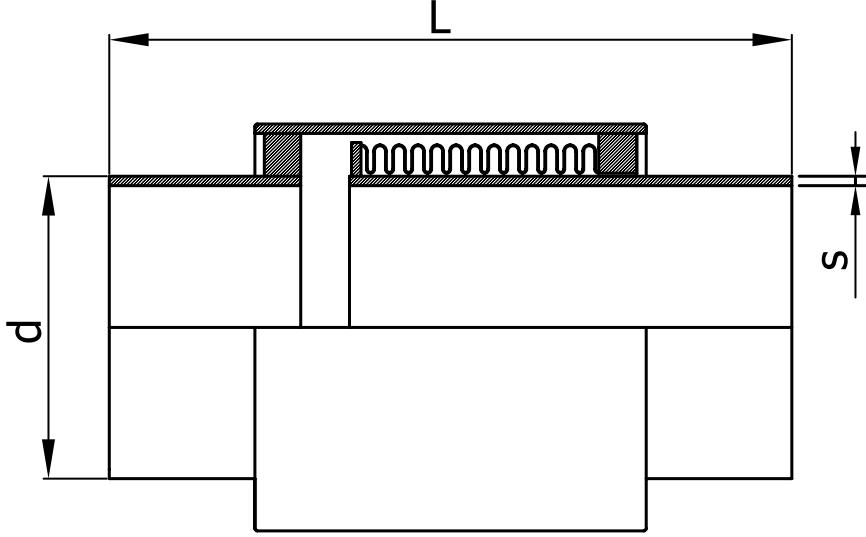

### MALZEME / MATERIALS

Körük / Bellow : Paslanmaz çelik / Stainless steel  
Layner / Liner : Paslanmaz çelik / Stainless steel  
Flanş / Flange : Karbon çelik / Carbon steel

### GENEL ÖZELLİKLER / GENERAL PROPERTIES

Standart No : TS 10880  
Basınç Sınıfı / Pressure Rating : PN16 / PN25  
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 420 °C

DN	L (30mm)	L (60mm)	L (90mm)	d	s	D
25	295	395	520	33,7	2,6	88,9
32	305	405	530	42,4	3,2	88,9
40	315	415	535	48,3	3,2	88,9
50	320	420	555	60,3	3,6	114,3
65	335	430	560	76,1	3,6	114,3
80	335	435	585	88,9	4	139,7
100	340	450	585	114,3	4,5	165
125	355	485	595	139,7	5	193,7
150	365	495	615	165	5	219,1
200	415	540	685	219,1	4,5	323,9
250	440	605	760	273	5,6	355,6
300	440	550	580	323,9	5,6	406,4
350	385	480	620	355,6	6	457,2
400	385	490	625	406,4	6	508,6