
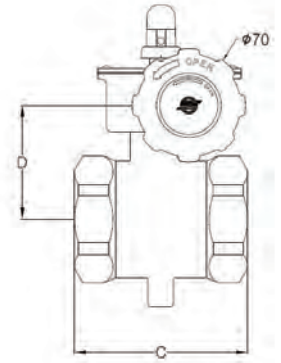
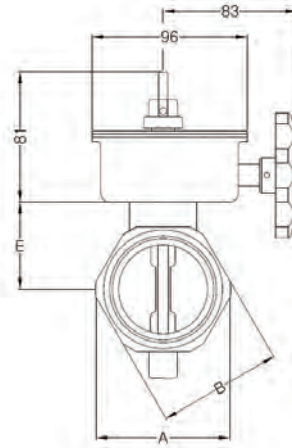


Bronze Butterfly Valve

İzlenebilir Kelebek Vana

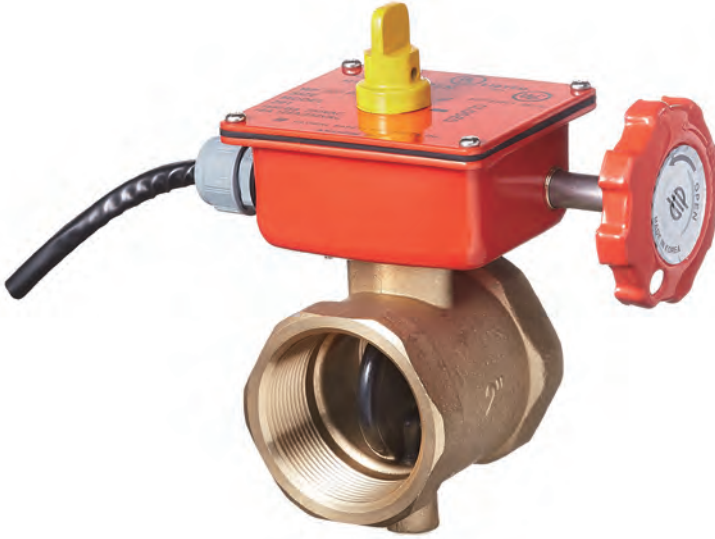

SPECIFICATIONS

- WORKING PRESSURE 175 psi (12 bar)
- MAX. TEST PRESSURE 350 psi (24 bar)
- TEMPERATURE RANGE ~250°F (~120°C)

Factory Installed UL Approved Tempered Switch for Indoor / *outdoor use

MATERIAL SPECIFICATIONS

Component	Material
Body	Brass, Bronze
Disc	Bronze EPDM Encapsulated
Stem	AISI 410
Signal Gearbox	ASTM A619
Hand Wheel	ASTM A619
O-ring	EPDM
Gasket	EPDM

* Under Process

DIMENSIONS

Nominal Valve Size Inches (DN)	Pipe OD Inches	Nominal Dimensions Inches (mm)					Weight Lbs. (kg)
		A	B	C	D	E	
1	1.32	1.72 (43.7)	1.56 (39.7)	2.13 (54.0)	2.05 (52.0)	1.46 (37.0)	3.30 1.5
1-1/4	1.66	2.09 (53.2)	1.93 (49.0)	2.64 (67.0)	2.20 (56.0)	1.61 (41.0)	3.74 1.7
1-1/2	1.90	2.30 (58.5)	2.20 (56.0)	2.87 (73.0)	2.32 (59.0)	1.73 (44.0)	3.96 1.8
2	2.38	2.99 (76.0)	2.76 (70.0)	3.24 (82.4)	2.52 (64.0)	1.93 (49.0)	5.28 2.4
2-1/2	2.88	3.50 (89.0)	3.31 (84.0)	4.09 (104)	2.56 (65.0)	1.97 (50.0)	6.62 3.1