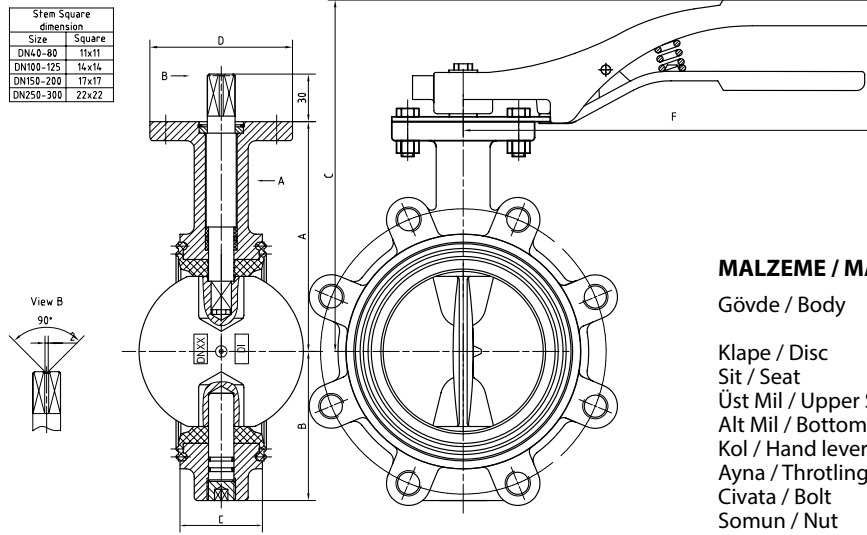


BLN-0202 / BLN-0302**CERTIFICATIONS**

Basınç Sınıfı : PN16
 Gövde : Dökme demir (BLN-0202)
 Sfero döküm (BLN-0302)
 Klapa : Paslanmaz çelik
 Conta : EPDM veya NBR
 İzolasyona uygun boyun dizaynı
 El kumandalı (DN40...DN200)
 Dişli kutulu (DN250...DN300)

Pressure Rating : PN16
 Body : Cast iron (BLN-0202)
 Ductile iron (BLN-0302)
 Disc : Stainless steel
 Seat : EPDM or NBR
 Long neck design for high thickness insulated pipes
 Hand lever (DN40...DN200)
 Gear box (DN250...DN300)

PRODUCT	SIZE
BLN-0202X040	DN 40
BLN-0202X050	DN 50
BLN-0202X065	DN 65
BLN-0202X080	DN 80
BLN-0202X100	DN 100
BLN-0202X125	DN 125
BLN-0202X150	DN150
BLN-0202X200	DN 200
BLN-0202X250	DN 250
BLN-0202X300	DN 300

**MALZEME / MATERIALS**

Gövde / Body : BLN 0202 Pk döküm / Cast iron (GG25)
 BLN 0302 Sfero döküm / Ductile iron (GGG40.3)
 Klapa / Disc : Paslanmaz çelik / Stainless steel
 Sit / Seat : EPDM / NBR
 Üst Mil / Upper Stem : Paslanmaz çelik / Stainless steel
 Alt Mil / Bottom Stem : Paslanmaz çelik / Stainless steel
 Kol / Hand lever : Karbon çelik / Carbon steel
 Ayna / Throtling Plate : Karbon çelik / Carbon steel
 Civata / Bolt : Karbon çelik / Carbon steel
 Somun / Nut : Karbon çelik / Carbon steel

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Standart No : TS EN 593 + A1
 Basınç Sınıfı / Pressure Rating : PN16
 Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : EPDM için 120 °C (Su) / EPDM for 120 °C (Water)
 NBR için 90 °C (Su ve madeni yağ) / NBR for 90 °C (Water and petroleum oil)

DN	A	B	E	D	F	C	Kv	dxn
40	140	63,5	34,5	90	260	217	49,5	M16 x 4
50	140	68,5	43	90	260	217	115	M16 x 4
65	152	76	45	90	260	229	255	M16 x 4
80	160	85	46	90	260	237	375	M16 x 8
100	180	100	51,5	90	260	257	760	M16 x 8
125	191	120	56	90	260	268	1030	M16 x 8
150	202	132	56,5	90	260	279	1790	M20 x 8
200	237	160	60	125	326	336	3450	M20 x 12
250	274	200	68,5	125	416	376	5050	M24 x 12
300	312	230	79,5	125	416	414	7420	M24 x 12