

> SÜRGÜLÜ VANA

GATE VALVE

GAV-0201




Basınç Sınıfı : PN16
Gövde : Pik döküm
Disk : Elastomer kaplı
Mil : Paslanmaz çelik
Flanşlı

Pressure Rating : PN16
Body : Cast iron
Disc : Elastomer coated
Stem : Stainless steel
Flanged

CERTIFICATIONS



PRODUCT	SIZE
GAV-0201X040	DN 40
GAV-0201X050	DN 50
GAV-0201X065	DN 65
GAV-0201X080	DN 80
GAV-0201X100	DN 100
GAV-0201X125	DN 125
GAV-0201X150	DN 150
GAV-0201X200	DN 200
GAV-0201X250	DN 250
GAV-0201X300	DN 300

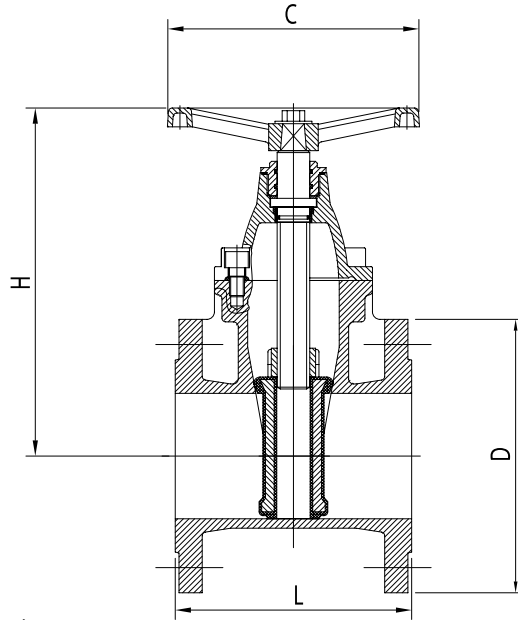

MALZEME / MATERIALS

Gövde / Body : Pick döküm / Cast iron (GG25)
Kapak / Bonnet : Sfero döküm / Ductile iron
Sürgü / Wedge : EPDM kaplı sfero döküm / EPDM coated ductile iron
Mil / Stem : Paslanmaz çelik / Stainless steel
O-Ring : EPDM
Conta / Gasket : EPDM
Civata / Bolt : Karbon çelik / Carbon steel
Somun / Nut : Piring / Brass

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating : PN16 / PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 120 °C

DN	L	H	D	C
50	150	197	165	160
65	170	228	185	200
80	180	254	200	200
100	190	281	220	200
125	200	340	250	250
150	210	378	285	250
200	230	460	340	320
250	250	563	400	366
300	270	643	455	366