

> **U FLEKS**

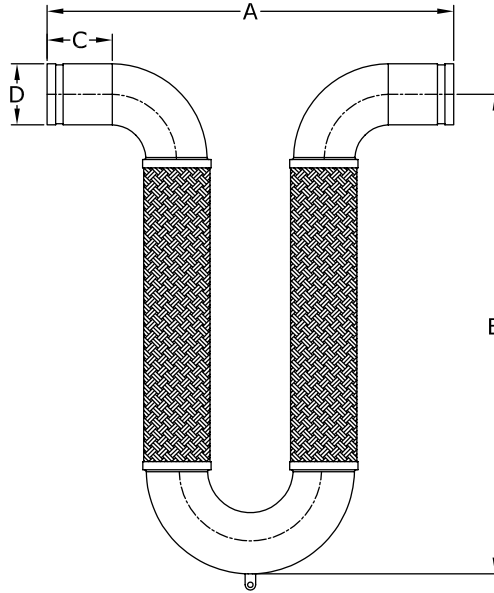
U FLEX

OF-1001**CERTIFICATIONS**

Basınç Sınıfı : PN16
 Körük : Paslanmaz çelik
 Boru : Karbon çelik
 Flanş : Karbon çelik
 Flanşlı / Kaynaklı / Yivli

Pressure Rating : PN16
 Bellow : Stainless steel
 Pipe : Carbon steel
 Flange : Carbon steel
 Flanged / Welded / Grooved

PRODUCT	SIZE
OF-1001X025	DN 25
OF-1001X032	DN 32
OF-1001X040	DN 40
OF-1001X050	DN 50
OF-1001X065	DN 65
OF-1001X080	DN 80
OF-1001X100	DN 100
OF-1001X125	DN 125
OF-1001X150	DN 150
OF-1001X200	DN 200
OF-1001X250	DN 250

**MALZEME / MATERIALS**

Körük / Bellow : Paslanmaz çelik / Stainless steel
 Örgü / Braiding : Paslanmaz çelik / Stainless steel
 Boru / Pipe : Karbon çelik / Carbon steel

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating : PN10 / PN16
 Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 420 °C

DN	A	B	G	D
25	255	325	50	33,7
32	295	360	50	42,4
40	330	380	50	48,3
50	445	435	70	60,3
65	520	480	70	76,1
80	600	555	70	88,9
100	750	675	70	114,3
125	965	835	100	139,7
150	1115	930	100	165
200	1450	1150	100	219,1
250	1725	1330	100	273

Bütün çaplarda (X,Y,Z) hareket miktarı 100 mm'dir
 X,Y,Z movement is 100 mm.