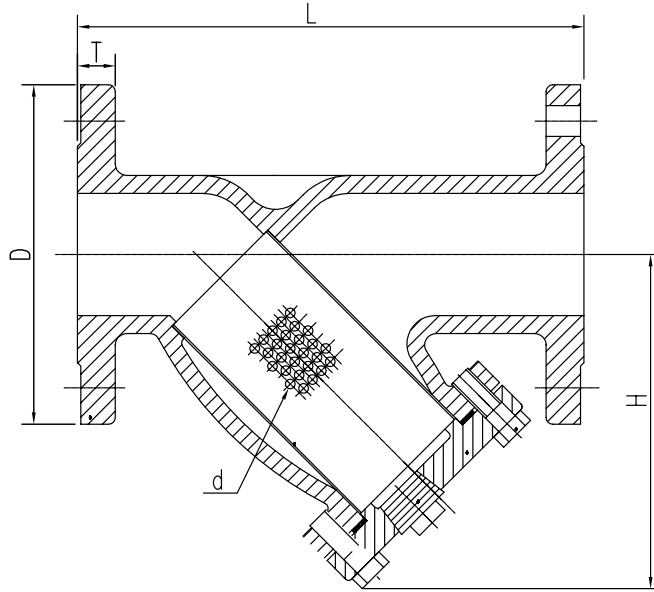


STR-0201

Basınç Sınıfı : PN16
 Gövde : Pisk döküm
 Filtre : Paslanmaz çelik
 Kapak : Boşaltma tapalı
 Conta : EPDM
 Flanşlı

Pressure Rating : PN16
 Body : Cast iron
 Screen : Stainless steel
 Cover : With drain plug
 Seat : EPDM
 Flanged

PRODUCT	SIZE
STR-0201X050	DN 50
STR-0201X065	DN 65
STR-0201X080	DN 80
STR-0201X100	DN 100
STR-0201X125	DN 125
STR-0201X150	DN150
STR-0201X200	DN 200
STR-0201X250	DN 250
STR-0201X300	DN 300

CERTIFICATIONS**MALZEME / MATERIALS**

Gövde / Body : Pisk döküm, Sfero döküm / Cast iron, Ductile iron
 Kapak / Cover : Pisk döküm, Sfero döküm / Cast iron, Ductile iron
 Filtre / Screen : Paslanmaz çelik / Stainless steel
 Boşaltma Tapası / Flag : Sfero döküm / Ductile iron
 Conta / Gasket : EPDM
 Civata / Bolt : Karbon çelik / Carbon steel

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Standart No : TS 11494
 Basınç Sınıfı / Pressure Rating : PN16
 Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : Pisk döküm +250 °C / Cast iron +250 °C
 Sfero döküm +300 °C / Ductile iron +300 °C

DN	L	H	D	T	d	TAPA / PLUG
50	230	130	165	17	Ø 1,5	1,2"
65	290	156	185	17	Ø 1,5	1"
80	310	172	200	17	Ø 1,5	1"
100	350	215	220	17	Ø 3	1"
125	400	240	250	17	Ø 3	1 1/4"
150	480	282	285	17	Ø 3	1 1/2"
200	600	335	340	18	Ø 3	1 1/2"
250	730	460	400	20	Ø 3	2"
300	850	515	455	22,5	Ø 3	2"