

> DIŞTAN BASINÇLI METAL KOMPANSATÖR (LAYNERLİ) METAL EXPANSION JOINT (WITH LINER)

UEJ-0908




CERTIFICATIONS



Basınç Sınıfı : PN16 / PN25
Körük : Paslanmaz çelik
İç / Dış Boru : Karbon çelik
Flanş : Karbon çelik
Layner : Paslanmaz çelik
Genleşme : 30 mm / 60 mm
Flanşlı

Pressure Rating : PN16 / PN25
Bellow : Stainless steel
Pipes : Carbon steel
Flange : Carbon steel
Liner : Stainless steel
Expansion : 30 mm / 60 mm
Flanged

PRODUCT	SIZE
UEJ-0908X025	DN 25
UEJ-0908X032	DN 32
UEJ-0908X040	DN 40
UEJ-0908X050	DN 50
UEJ-0908X065	DN 65
UEJ-0908X080	DN 80
UEJ-0908X100	DN 100
UEJ-0908X125	DN 125
UEJ-0908X150	DN 150
UEJ-0908X200	DN 200
UEJ-0908X250	DN 250

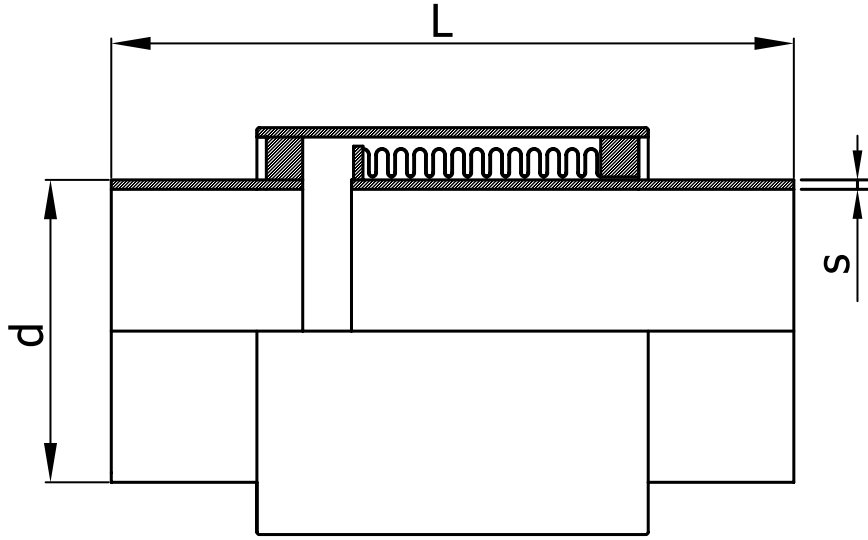

MALZEME / MATERIALS

Körük / Bellow : Paslanmaz çelik / Stainless steel
Layner / Liner : Paslanmaz çelik / Stainless steel
Flanş / Flange : Karbon çelik / Carbon steel

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Standart No : TS 10880
Basınç Sınıfı / Pressure Rating : PN16 / PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 420 °C

DN	L (30mm)	L (60mm)	L (90mm)	d	s	D
25	295	395	520	33,7	2,6	88,9
32	305	405	530	42,4	3,2	88,9
40	315	415	535	48,3	3,2	88,9
50	320	420	555	60,3	3,6	114,3
65	335	430	560	76,1	3,6	114,3
80	335	435	585	88,9	4	139,7
100	340	450	585	114,3	4,5	165
125	355	485	595	139,7	5	193,7
150	365	495	615	165	5	219,1
200	415	540	685	219,1	4,5	323,9
250	440	605	760	273	5,6	355,6