

> BASINÇ DÜŞÜRÜCÜ KONTROL VANASI

PRESSURE REDUCING CONTROL VALVE


UPRV-0301




Basınç Sınıfı : PN16 / PN25
 Gövde : Sfero döküm
 Diyafram : EPDM
 Flanşlı / Yivli

Pressure Rating : PN16 / PN25
 Body : Ductile iron
 Disc : EPDM
 Flanged / Grooved

PRODUCT	SIZE
UPRV-0301X050	DN 50
UPRV-0301X065	DN 65
UPRV-0301X080	DN 80
UPRV-0301X100	DN 100
UPRV-0301X125	DN 125
UPRV-0301X150	DN 150
UPRV-0301X200	DN 200

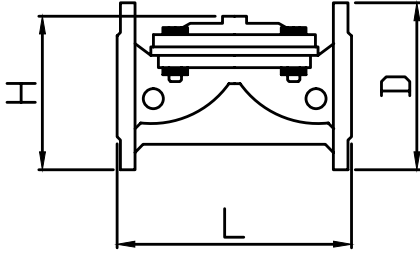

Head Loss Chart / Basınç Düşümü Tablosu

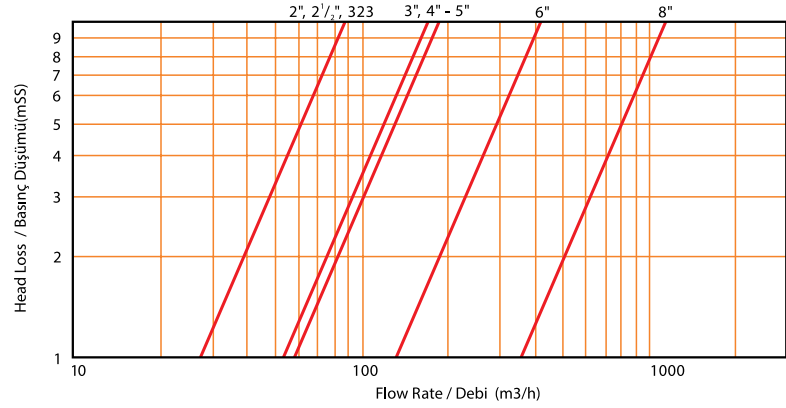

MALZEME / MATERIALS

Gövde / Body : Sfero döküm / Ductile iron (GGG40.3)
 Kapak / Bonnet : Sfero döküm / Ductile iron
 Diyafram / Diaphragm : EPDM kaplı sfero döküm / EPDM coated ductile iron

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating : PN16 / PN25
 Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 90 °C

DN	D	L	H	Kv
50	165	220	150	88
65	185	220	155	88
80	200	283	172	174
100	220	335	180	187
125	250	372	200	187
150	285	395	305	419
200	340	460	383	1139