

> RELIEF VANA RELIEF VALVE


URLV-0301




Basınç Sınıfı : PN16 / PN25
Gövde : Sfero döküm
Diyafram : EPDM
Flanşlı / Yivli

Pressure Rating : PN16 / PN25
Body : Ductile iron
Disc : EPDM
Flanged / Grooved

PRODUCT	SIZE
URLV-0301X050	DN 50
URLV-0301X065	DN 65
URLV-0301X080	DN 80
URLV-0301X100	DN 100
URLV-0301X125	DN 125
URLV-0301X150	DN 150
URLV-0301X200	DN 200

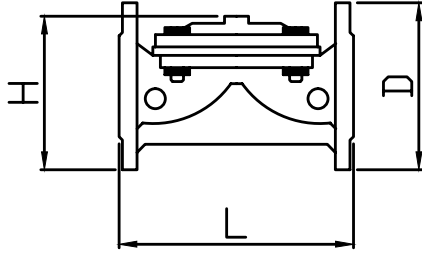

Head Loss Chart / Basınç Düşümü Tablosu

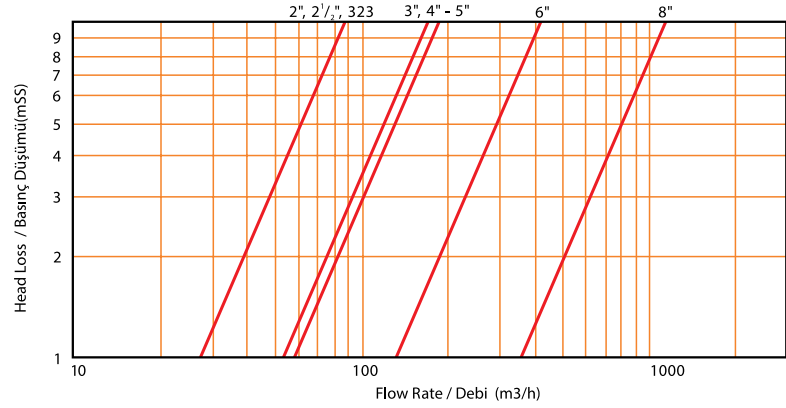

MALZEME / MATERIALS

Gövde / Body : Sfero döküm / Ductile iron (GGG40.3)
Kapak / Bonnet : Sfero döküm / Ductile iron
Diyafram / Diaphragm : EPDM kaplı sfero döküm / EPDM coated ductile iron

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating : PN16 / PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 90 °C

DN	D	L	H	Kv
50	163	212	149	102
65	184	220	154	102
80	204	286	173	201
100	210	330	173	216
125	262	368	212	216
150	288	394	325	484
200	350	462	392	1316