

> BASINÇ DÜŞÜRÜCÜ KONTROL VANASI

PRESSURE REDUCING CONTROL VALVE

UPRV-0301




Basınç Sınıfı : PN16 / PN25
Gövde : Sfero döküm
Diyafram : EPDM
Flanşlı / Yivli


Pressure Rating : PN16 / PN25
Body : Ductile iron
Disc : EPDM
Flanged / Grooved

PRODUCT	SIZE
UPRV-0301X050	DN 50
UPRV-0301X065	DN 65
UPRV-0301X080	DN 80
UPRV-0301X100	DN 100
UPRV-0301X125	DN 125
UPRV-0301X150	DN 150
UPRV-0301X200	DN 200

CERTIFICATIONS

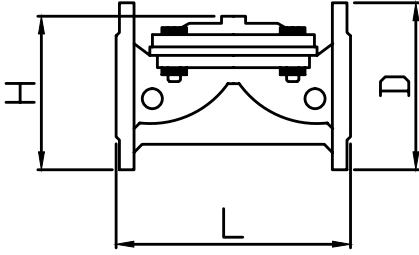

Head Loss Chart / Basınç Düşümü Tablosu

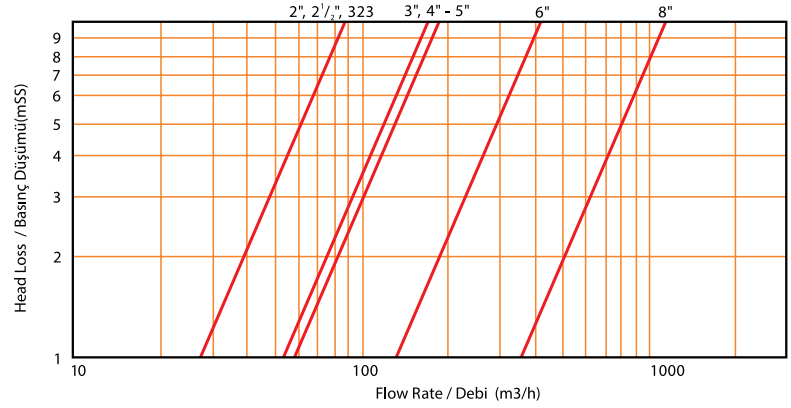

MALZEME / MATERIALS

Gövde / Body : Sfero döküm / Ductile iron (GGG40.3)
Kapak / Bonnet : Sfero döküm / Ductile iron
Diyafram / Diaphragm : EPDM kaplı sfero döküm / EPDM coated ductile iron

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating : PN16 / PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 90 °C

DN	D	L	H	Kv
50	165	220	150	88
65	185	220	155	88
80	200	283	172	174
100	220	335	180	187
125	250	372	200	187
150	285	395	305	419
200	340	460	383	1139