

> DIŞTAN BASINÇLI METAL KOMPANSATÖR

METAL EXPANSION JOINT

UEJ-0907 / 0908




CERTIFICATIONS



Basınç Sınıfı : PN16 / PN25
Körük : Paslanmaz çelik
İç / Dış Boru : Karbon çelik
Flanş : Karbon çelik
Genleşme : 30 mm / 60 mm
Flanşlı / Kaynak Boyunlu

Pressure Rating : PN16 / PN25
Bellow : Stainless steel
Pipes : Carbon steel
Flange : Carbon steel
Expansion : 30 mm / 60 mm
Flanged / Welded End

PRODUCT	SIZE
UEJ-0907/08X025	DN 25
UEJ-0907/08X032	DN 32
UEJ-0907/08X040	DN 40
UEJ-0907/08X050	DN 50
UEJ-0907/08X065	DN 65
UEJ-0907/08X080	DN 80
UEJ-0907/08X100	DN 100
UEJ-0907/08X125	DN 125
UEJ-0907/08X150	DN 150
UEJ-0907/08X200	DN 200
UEJ-0907/08X250	DN 250
UEJ-0907/08X300	DN 300
UEJ-0907/08X350	DN 350
UEJ-0907/08X400	DN 400

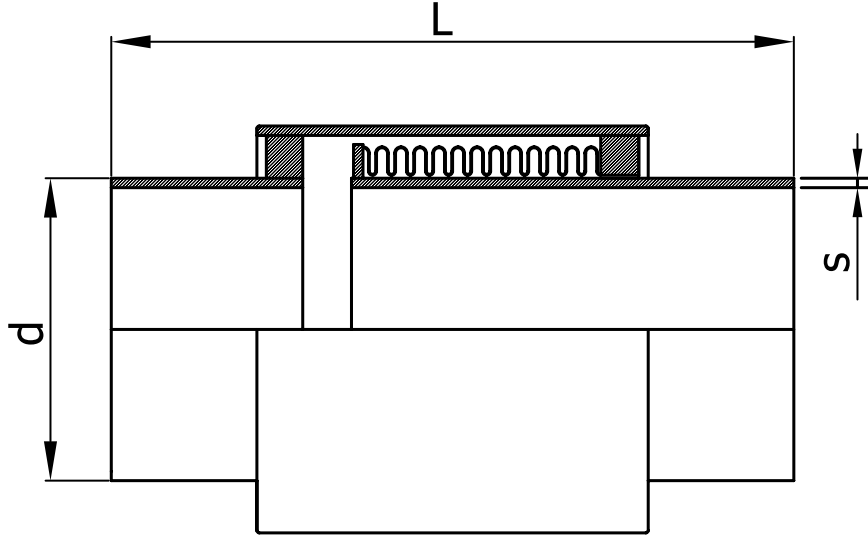

MALZEME / MATERIALS

Körük / Bellow : Paslanmaz çelik / Stainless steel
Layner / Liner : Paslanmaz çelik / Stainless steel
Flanş / Flange : Karbon çelik / Carbon steel

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Standart No : TS 10880
Basınç Sınıfı / Pressure Rating : PN16 / PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 420 °C

DN	L (30mm)	L (60mm)	L (90mm)	d	s	D
25	295	395	520	33,7	2,6	88,9
32	305	405	530	42,4	3,2	88,9
40	315	415	535	48,3	3,2	88,9
50	320	420	555	60,3	3,6	114,3
65	335	430	560	76,1	3,6	114,3
80	335	435	585	88,9	4	139,7
100	340	450	585	114,3	4,5	165
125	355	485	595	139,7	5	193,7
150	365	495	615	165	5	219,1
200	415	540	685	219,1	4,5	323,9
250	440	605	760	273	5,6	355,6
300	440	550	580	323,9	5,6	406,4
350	385	480	620	355,6	6	457,2
400	385	490	625	406,4	6	508,6