

> FLATÖRÜLÜ VANA

FLOAT VALVE

UFGV-0301





CERTIFICATIONS



Basınç Sınıfı	: PN16-PN25
Gövde	: Sfero Döküm
Trim	: Paslanmaz Çelik Flanşlı/Yivli
Pressure Rating	: PN16-PN25
Body	: Ductile Iron
Pilot	: Stainless Steel Flanged/Grooved

PRODUCT	SIZE
UFGV-0301X050	DN 50
UFGV-0301X065	DN 65
UFGV-0301X080	DN 80
UFGV-0301X100	DN 100
UFGV-0301X125	DN 125
UFGV-0301X150	DN 150
UFGV-0301X200	DN 200
UFGV-0301X250	DN 250
UFGV-0301X300	DN 300

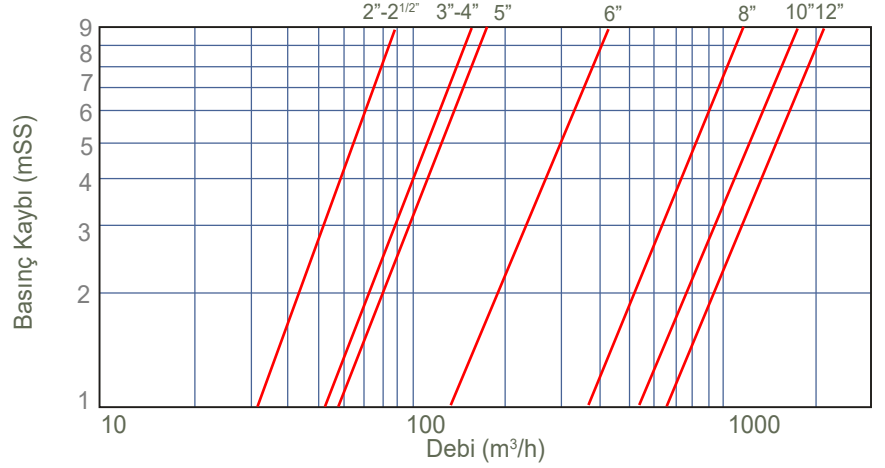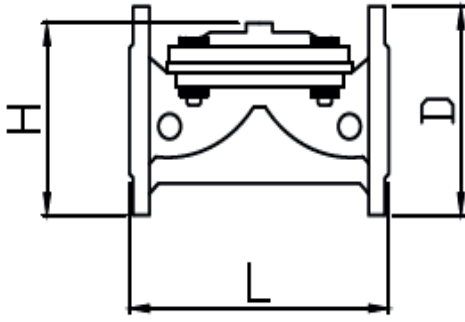

MALZEME / MATERIALS

Gövde / Body	: Sfero döküm / Ductile iron
Kapak / Bonnet	: Sfero döküm / Ductile iron
Diyafram / Diaphragm	: EPDM

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating	: PN16-PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp.	: 10°C ... + 80 °C

DN	D	L	H	Kv
50	163	212	149	102
65	184	220	154	102
80	204	286	173	201
100	210	330	173	216
125	262	368	212	216
150	288	394	325	484
200	350	462	392	1316
250	405	545	485	1961
300	460	582	500	2629