

GAV-0301 / GAV-0302




CERTIFICATIONS



Basınç Sınıfı	: PN16
Gövde	: Sfero döküm (GAV-0301) Sfero döküm (GAV-0302)
Disk	: Elastomer kaplı
Mil	: Paslanmaz çelik Flanşlı
Pressure Rating	: PN16
Body	: Cast iron (GAV-0301) Ductile iron (GAV-0302)
Disc	: Elastomer coated
Stem	: Stainless steel Flanged

PRODUCT	SIZE
GAV-0301X040	DN 40
GAV-0301X050	DN 50
GAV-0301X065	DN 65
GAV-0301X080	DN 80
GAV-0301X100	DN 100
GAV-0301X125	DN 125
GAV-0301X150	DN 150
GAV-0301X200	DN 200
GAV-0301X250	DN 250
GAV-0301X300	DN 300

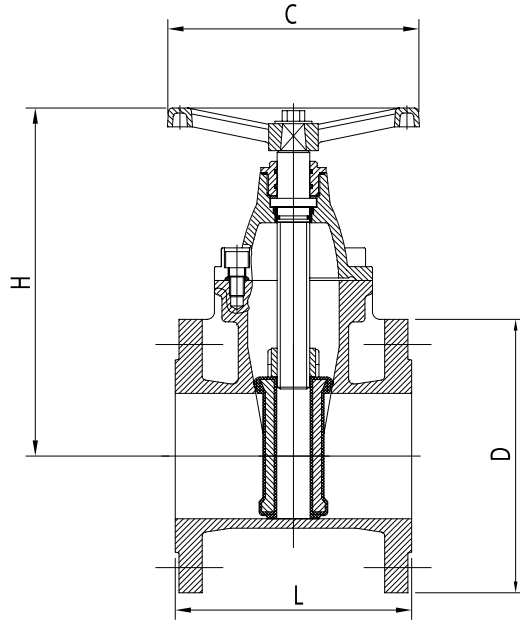

MALZEME / MATERIALS

Gövde / Body	: Sfero döküm / Ductile iron
Kapak / Bonnet	: Sfero döküm / Ductile iron
Sürgü / Wedge	: EPDM kaplı sfero döküm / EPDM coated ductile iron
Mil / Stem	: Paslanmaz çelik / Stainless steel
O-Ring	: EPDM
Conta / Gasket	: EPDM
Civata / Bolt	: Karbon çelik / Carbon steel
Somun / Nut	: Pirinç / Brass

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Basınç Sınıfı / Pressure Rating	: PN16 / PN25
Maksimum Çalışma Sıcaklığı / Maximum Working Temp.	: 120 °C

DN	L	H	D	C
50	150	197	165	160
65	170	228	185	200
80	180	254	200	200
100	190	281	220	200
125	200	340	250	250
150	210	378	285	250
200	230	460	340	320
250	250	563	400	366
300	270	643	455	366